



Accessories

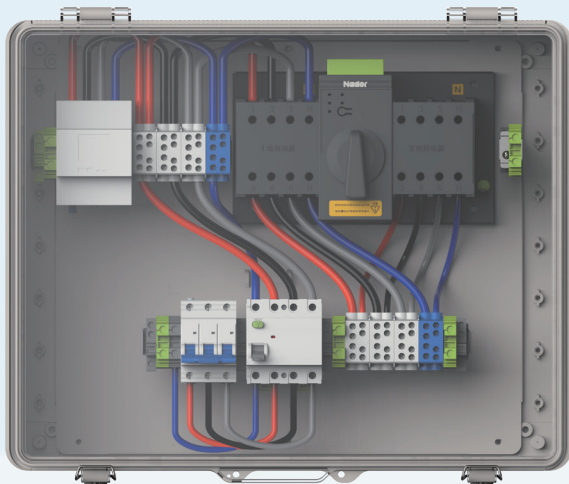

X3-EPS BOX G2

WHOLE HOME BACKUP SOLUTION

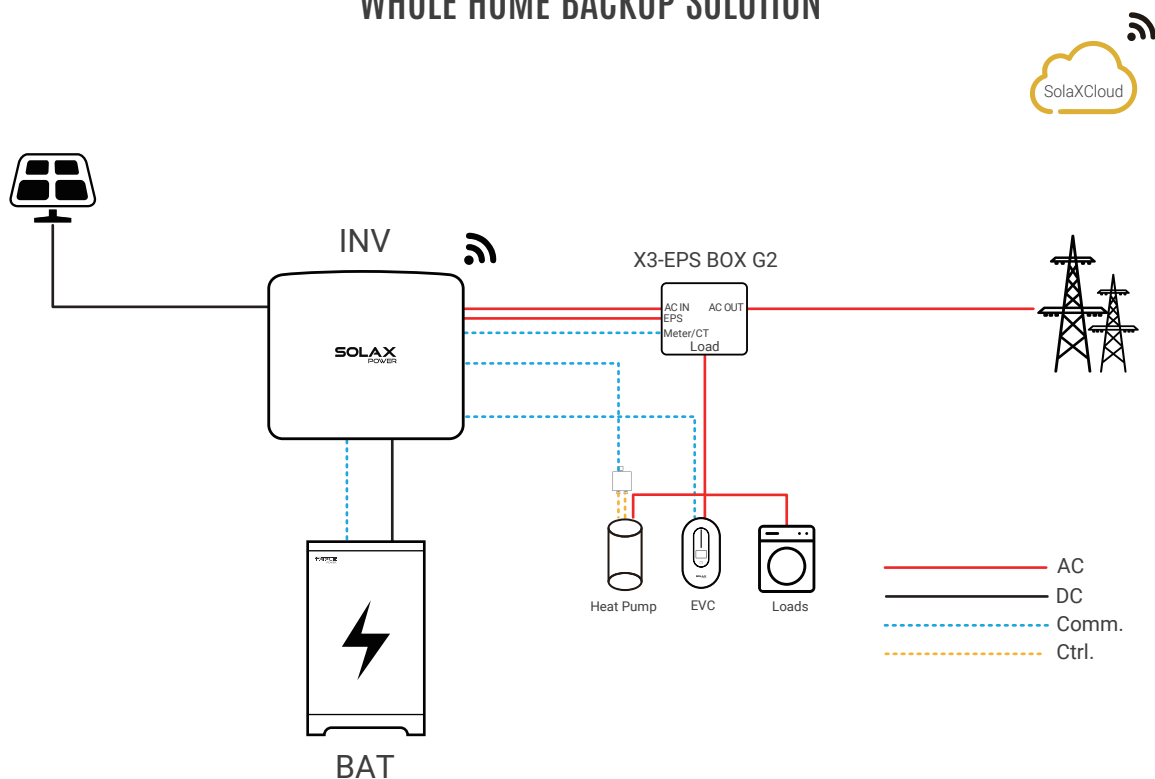

AC Switching Cabinet

ON-GRID(Inverter)	
Rated AC voltage	220 / 230 / 240 V
Rated AC frequency	50 / 60 Hz
Max.output apparent power	16500 VA
Max.output current	24 A
OFF-GRID(Inverter)	
Rated output voltage	230 V
Rated AC frequency	50 / 60 Hz
Max.output apparent power	16500 VA
Max.output current	24 A
GRID(Utility)	
Rated grid voltage	220 / 230 / 240 V
Rated AC frequency	50 / 60 Hz
Max.input current	63 A
Max.output current	25 A
LOAD	
Rated AC voltage	220 / 230 / 240 V
Rated AC frequency	50 / 60 Hz
Max.current	63 A
ENVIRONMENT LIMIT	
Components	25 A × 3
Ingress protection	IP54
Protective class	Class I
Shock resistance level	IK09
Operating temperature range	-35~60°C (> 45°C derating)
Storage temperature	-40~70°C
Relative humidity	4~100% RH (condensing)
Switchover time	≤ 1.8 s
Max.operating altitude	3000 m
Noise emission (typical)	< 30 dB(A)
Overvoltage category	Mains: III
OTHER	
Cooling concept	Nature cooling
DIMENSION AND WEIGHT	
Dimensions (W × H × D)	540 × 430 × 202 mm
Net weight	12.5 kg